


24° konus / 24° konus
24° cone end / 24° cone end
24° Anschluss / 24° Anschluss

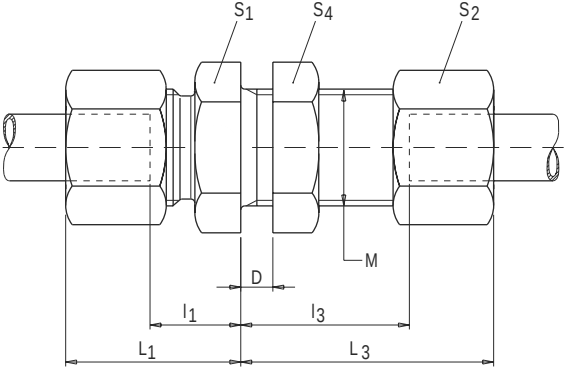

D_{max} = 16 mm

Red Series Reihe	PN	CevØ spoljašnji Tube o.d. RohrØ aussen	M	I ₁	L ₁	I ₃	L ₃	S ₁	S ₂	S ₄	Oznaka Part no. Bezeichnung	kg za 100 kom. kg per 100 pcs kg per 100 St.
L	315	06	M12x1,5	7	22	27	42	17	14	17	D 06-L	6,7
		08	M14x1,5	8	23	27	42	19	17	19	D 08-L	8,4
		10	M16x1,5	10	25	28	43	22	19	22	D 10-L	11,0
		12	M18x1,5	10	25	29	44	24	22	24	D 12-L	13,3
		15	M22x1,5	12	27	31	46	27	27	30	D 15-L	22,8
		18	M26x1,5	13,5	30	32,5	49	32	32	36	D 18-L	33,2
	160	22	M30x2	16,5	33	34,5	51	36	36	41	D 22-L	41,5
		28	M36x2	18,5	35	35,5	52	41	41	46	D 28-L	52,5
		35	M45x2	18,5	40	36,5	58	50	50	55	D 35-L	80,0
		42	M52x2	19	42	36	59	60	60	65	D 42-L	119,3
T	630	06	M14x1,5	12	27	29	44	19	17	19	D 06-T	9,6
		08	M16x1,5	13	28	29	44	22	19	22	D 08-T	12,4
		10	M18x1,5	14,5	31	29,5	46	24	22	24	D 10-T	18,1
		12	M20x1,5	14,5	31	30,5	47	27	24	27	D 12-T	21,0
		14	M22x1,5	17	35	32	50	30	27	30	D 14-T	29,0
	400	16	M24x1,5	16,5	35	31,5	50	32	30	32	D 16-T	31,0
		20	M30x2	17,5	39	33,5	55	41	36	41	D 20-T	54,5
		25	M36x2	20	44	35	59	46	46	46	D 25-T	89,0
		30	M42x2	21,5	48	37,5	64	50	50	50	D 30-T	107,7
	315	38	M52x2	22	53	37	68	65	60	65	D 38-T	173,0

L_{1/3} = kada je navrtka u pritegnutom stanju

L_{1/3} = approx. figures with tightened nut

L_{1/3} = ween die Überwurfmutter im angezogenen Zustand ist