


24° konus / 24° konus
 24° cone end / 24° cone end
 24° Anschluss / 24° Anschluss

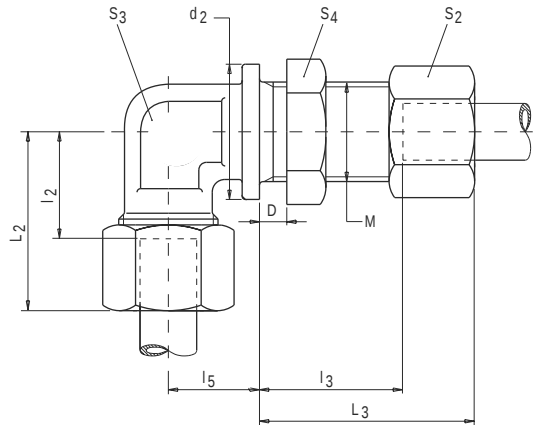

D_{max} = 16 mm

Red Series Reihe	PN	Cev Øspoljašnji Tube o.d. Rohr Øausen	M	d ₂	I ₂	L ₂	I ₃	L ₃	I ₅	S ₂	S ₃	S ₄	Oznaka Part no. Bezeichnung	kg za 100 kom. kg per 100 pcs kg per 100 St.
L	315	06	M12x1,5	17	12	27	27	42	14	14	12	17	F 06-L	7,5
		08	M14x1,5	19	14	29	27	42	17	17	12	19	F 08-L	9,9
		10	M16x1,5	22	15	30	28	43	18	19	14	22	F 10-L	12,0
		12	M18x1,5	24	17	32	29	44	20	22	17	24	F 12-L	15,0
		15	M22x1,5	27	21	36	31	46	23	27	19	30	F 15-L	25,0
		18	M26x1,5	32	23,5	40	32,1	49	24	32	24	36	F 18-L	35,5
	160	22	M30x2	36	27,5	44	34,5	51	30	36	27	41	F 22-L	46,5
		28	M36x2	42	30,5	47	35,5	52	34	41	36	46	F 28-L	64,0
		35	M45x2	50	34,5	56	36,5	58	39	50	41	55	F 35-L	99,4
		42	M52x2	60	40	63	36	59	43	60	50	65	F 42-L	149,0
T	630	06	M14x1,5	19	16	31	29	44	17	17	12	19	F 06-T	10,5
		08	M16x1,5	22	17	32	29	44	18	19	14	22	F 08-T	14,0
		10	M18x1,5	24	17,5	34	29,5	46	20	22	17	24	F 10-T	19,0
		12	M20x1,5	27	21,5	38	30,5	47	21	24	17	27	F 12-T	22,5
		14	M22x1,5	27	22	40	32	50	23	27	19	30	F 14-T	30,0
	400	16	M24x1,5	30	24,5	43	31,5	50	24	30	24	32	F 16-T	36,5
		20	M30x2	36	26,5	48	33,5	55	30	36	27	41	F 20-T	58,0
		25	M36x2	42	30	54	35	59	34	46	36	46	F 25-T	100,0
		30	M42x2	50	35,5	62	37,5	64	39	50	41	50	F 30-T	130,0
	315	38	M52x2	60	41	72	37	68	43	60	50	65	F 38-T	197,0