


24° konus / podešljivi cevasti krak
 24° cone end / stand pipe adjustable
 24° Anschluss / Schaftanschluss

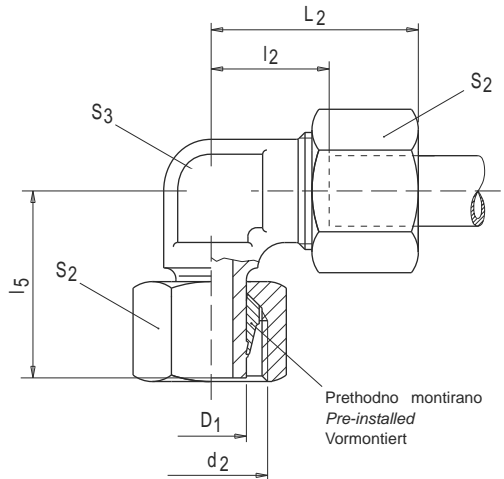

Red Series Reihe	PN	Cev Ø spoljašnji Tube o.d. Rohr Ø aussen	d ₂	l ₂	L ₂	l ₅	S ₃	S ₂	D ₁	Oznaka Part no. Bezeichnung	kg za 100 kom. kg per 100 pcs kg per 100 St.
L	315	06	M12x1,5	12	27	26	12	14	6	EC 06-L	3,6
		08	M14x1,5	14	29	27,5	12	17	8	EC 08-L	5,0
		10	M16x1,5	15	30	29	14	19	10	EC 10-L	6,8
		12	M18x1,5	17	32	29,5	17	22	12	EC 12-L	9,0
		15	M22x1,5	21	36	32,5	19	27	15	EC 15-L	15,3
	18	M26x1,5	23,5	40	35,5	24	32	18	EC 18-L	22,6	
	160	22	M30x2	27,5	44	38,5	27	36	22	EC 22-L	30,4
		28	M36x2	30,5	47	41,5	36	41	28	EC 28-L	42,5
		35	M45x2	34,5	56	51	41	50	35	EC 35-L	64,7
		42	M52x2	40	63	56	50	60	42	EC 42-L	99,7
T	630	06	M14x1,5	16	31	27	12	17	6	EC 06-T	5,7
		08	M16x1,5	17	32	27,5	14	19	8	EC 08-T	7,0
		10	M18x1,5	17,5	34	30	17	22	10	EC 10-T	11,1
		12	M20x1,5	21,5	38	31	17	24	12	EC 12-T	13,8
	400	14	M22x1,5	22	40	35	19	27	14	EC 14-T	18,9
		16	M24x1,5	24,5	43	36,5	24	30	16	EC 16-T	23,8
		20	M30x2	26,5	48	44,5	27	36	20	EC 20-T	36,2
		25	M36x2	30	54	50	36	46	25	EC 25-T	72,1
		30	M42x2	35,5	62	55	41	50	30	EC 30-T	96,4
	315	38	M52x2	41	72	63	50	60	38	EC 38-T	138,4

L₂ = kada je navrtka u pritegnutom stanju

L₂ = approx. figures with tightened nut

L₂ = wenn die Überwurfmutter im angezogenen Zustand ist