



SPECIAL PRODUCTS

ADDINOL MULTIFUNCTIONAL SPRAY

PRODUCT DESCRIPTION

ADDINOL Multifunctional Spray is made of a mixture of mineral oil, natural fatty acid esters and additives. It contains an additive combination with graphite as special solid lubricant.

Temperature range from -40°C up to +90°C.

Optimal temperature for application and storage from +15°C up to +25°C.

APPLICATION

- Particular suitability as universal lubricant for all mechanical components
- Versatile aid for automobiles, motorcycles, bicycles or garage, household and hobby
- Also has proven in industrial application

DELIVERY

Delivery in 500 ml aerosol cans (12 pieces per carton).

HANDLING

1. Shake can well before use.
2. Spraying distance approx. 15 to 20 cm, _ complete wetting.


Please repeat the procedure in dependence of load and weather if the product is used as temporary corrosion protection.

CHARACTERISTICS

- Lubricates, protects and maintains
- Very high effectiveness
- Very good penetrating properties ensures very high stability against humidity
- Wide temperature range
- Contains solid particles
- Chlorine-, bromine- and fluorine-free propellant gas based on propane-butane

ADVANTAGES AND BENEFITS

- **Universal usage**
- **Economical**
- **Very good protection at lubrication points which are difficult to access; easy solving of rusty connections**
- **Functional at extreme temperatures**
- **Very good protection against wear; excellent emergency lubricating properties**
- **Ozone-friendly**

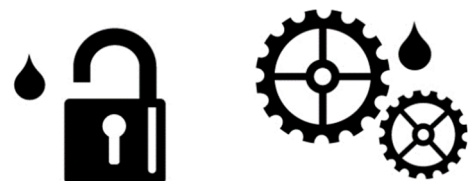



ADDINOL MULTIFUNCTIONAL SPRAY

SPECIFICATIONS AND TYPICAL PARAMETERS

Feature	Test condition / unit		Multifunctional Spray	Method acc. to
Temperature range		°C	-40 up to +90	
Colour – spray pattern			greyish	visual
Odour			mineral oil like	olfactory
Density – active agent	at 20°C	kg/m ³	800	DIN 51757
Flash point	COC	°C	< -20	DIN EN ISO 2592

ADDINOL - The Experts for High-Performance Lubricants

We at ADDINOL develop and produce more than 600 high-performance lubricants of the new generation. Among these are automotive lubricants for highest demands and pioneering developments for industrial applications. Our customers all over the world benefit from the high and stable quality of our ADDINOL high-performance lubricants, our know-how and the individual customer advisory service of our competent experts. Our company has world wide activities. ADDINOL high-performance lubricants are distributed by more than 90 international partners.

The data given in this product sheet represent our current level of knowledge and experience. Due to the various specific application they do, however, not discharge the user from his own examination. The information provided herein may not be used to derive a legally binding warranty of specific properties or the suitability for a certain purpose of application. Detailed security-concerning and toxicological data as well as security instructions for each product can be taken from the corresponding Material Safety Data Sheets (MSDS). High-performance lubricants from ADDINOL are under continuous development. Therefore, ADDINOL Lube Oil GmbH keeps the right to change technical data in this product data sheet without notification. In case of doubt, please do not hesitate to contact our customers' advisory service.